NO. 108

21606230020

U. S. PUBLIC LAND SURVEY MONUMENT RECORD

SECTION 23 T 16 N, R 6 W, TOWN OF BARRE

LA CROSSE COUNTY

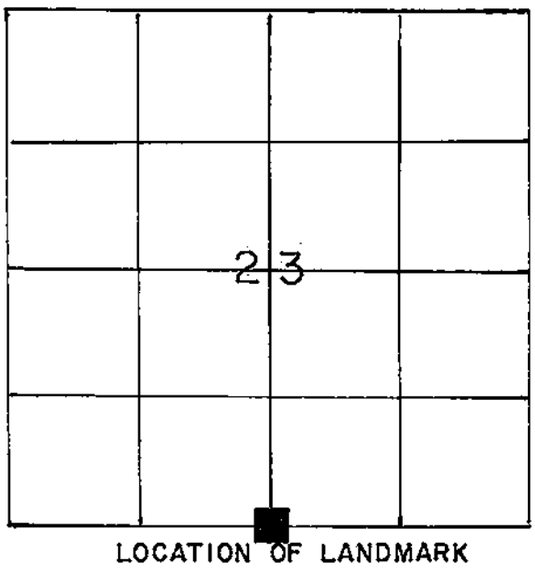

LOCATION OF LANDMARK

WISCONSIN COORDINATE SYSTEM
North
East
Theta Angle
Horiz. Order
Vert. Order
TYPE OF LANDMARK
STONE
BEARINGS ARE REFERENCED TO

Crew: William Jung
Perry Dahl
8/21/85

Describe any record evidence, monument evidence, testimonial evidence or any other material evidence you considered and whether the monument was found or restored through acceptance of an obliterated evidence location.

Local residents knew of a stone at this corner which we found. The West half of the stone is standing and the East half remnants are buried. Half of the old "X" shows. There was a guard pipe near the stone. I accepted this stone as the best available evidence of the original government corner position. I found (4) stumps that could have been bearing trees, but none of them checked with the records. I mounded up the stone.

Describe or show any material discrepancy between the location of the restored corner and that of the corner previously restored or reestablished.

None known.

RECORD OF DURABLE WITNESS MONUMENTS

NO	DESCRIPTION	MAGNETIC BEARING	DISTANCE
1	P.K. NAIL IN 5" HICKORY TREE (double blazed)	N75°W	10.54'
2	P.K. NAIL IN 6" ELM TREE "	S47°E	9.58'
3	P.K. NAIL IN 5" HICKORY TREE "	S89°E	14.04'
4	P.K. NAIL IN 5" HICKORY TREE "	N46°E	9.96'

(Each P.K. nail is in a hack.)

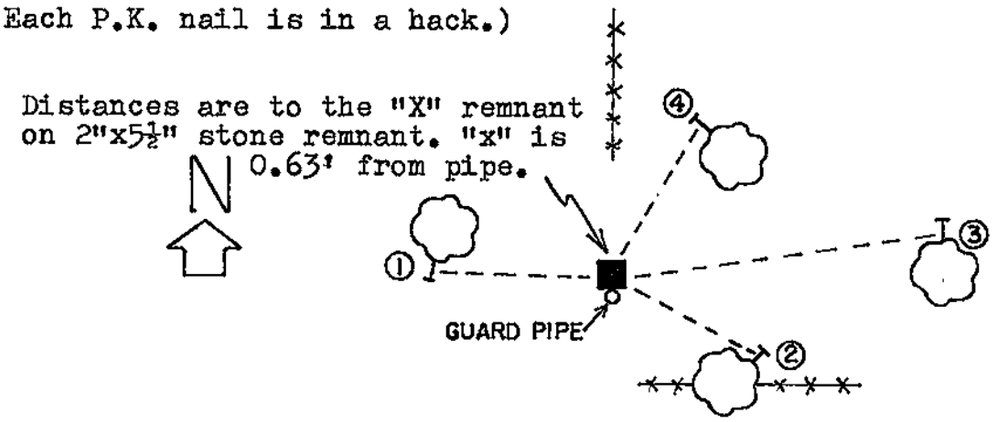

PLAN VIEW DRAWING OF REFERENCE TIES

MAP SHOWING DISTANCE AND DIRECTION TO OTHER PUBLIC LAND SURVEY CORNERS USED FOR REESTABLISHING THE CORNER

No measurements taken by me at this time.

I, William C. Jung, Deputy County Surveyor,
HEREBY CERTIFY THAT THE CORNER LOCATION SHOWN ON THIS RECORD WAS DETERMINED BY ME OR UNDER MY DIRECTION AND CONTROL AND THAT THIS U. S. PUBLIC LAND SURVEY MONUMENT RECORD IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

William C. Jung
Signature

2/12/86
Date

WISCONSIN
WILLIAM C. JUNG
S-1323
ONALASKA, WIS.
LAND SURVEYOR

Seal